

EARTHING

Driving Head for Solid Copper and Stainless Steel Earth Rods

The driving stud protects the thread and the top of the rod from damage when driving.

To Suit Rod Diameter	L	D	Weight	Pack Qty	Part Number
15, 16	39	14	0.04	25	ERCD 16
20	42	19	0.06	25	ERCD 20

Material:

Manufactured from Steel to BS970, grade 070M20.



Spike

Driving Head



Spike for Solid Copper and Stainless Steel Earth Rods

The steel spike enables the rod to be driven easily and stops the copper rod becoming damaged.

To Suit Rod Diameter	L	D	Weight	Pack Qty	Part Number
15, 16	42	14	0.04	25	ERCS 16
20	55	19	0.08	25	ERCS 20

Material:

Steel to BS 970 Grade 070 M20.

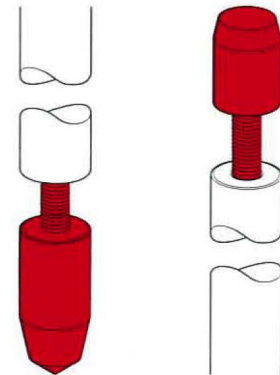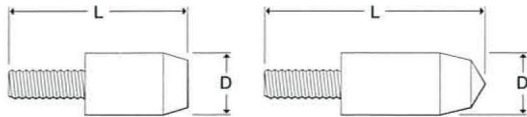

Coupling Dowels for Solid Copper and Stainless Steel Earth Rods

This Wallis coupling dowel is used to join the solid copper or stainless steel rods.

To suit Solid Copper Earth Rods

To Suit Rod Diameter	L	Weight	Pack Qty	Part Number
15, 16 and 20	39	0.02	10	ERD 01

To suit Stainless Steel Earth Rods

To Suit Rod Diameter	L	Weight	Pack Qty	Part Number
16	39	0.02	10	ERD 16

Material:

Steel to BS 970 Grade 070M20.



Coupling Dowel

