

EARTHING

Split Connector Clamp

These clamps are designed to be used with threaded and unthreaded rods. Suitable for connecting a cable lug to an earth rod.

The clamp is supplied threaded or unthreaded.




Rod Size	Rod Type	L	W	D	Weight	Pack Qty	Part Number
9.5	unthreaded	31	18	20	0.08	10	ERSO 10
5/8"	threaded	52	26	25	0.22	10	ERSO 16
16	unthreaded	42	25	32	0.24	10	ERSS 16
15	unthreaded	42	25	32	0.24	10	ERC 26
14.2	unthreaded	42	25	25	0.23	10	ERC 24
3/4"	threaded	50	29	28	0.31	10	ERSO 20
20	unthreaded	50	28	29	0.28	10	ERSS 20

All complete with hexagon M12 x 50 bolt, except ERC 24 which has a wing nut.

Material:

Body - Gunmetal or Naval Brass.

Bolt - Brass.

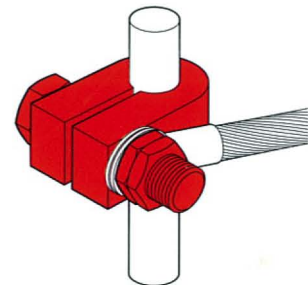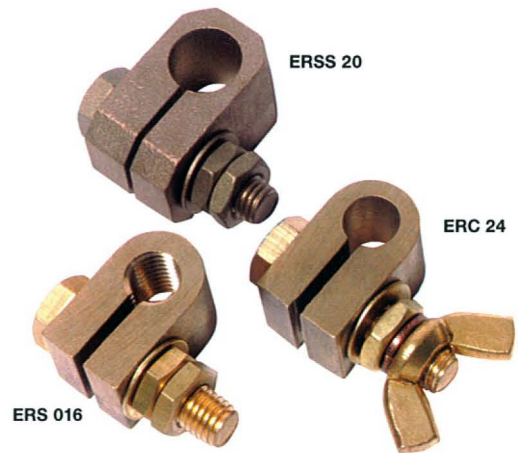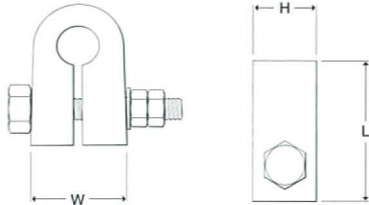

Disconnecting Link

The link is mainly used to offer a temporary break in the connection to earth allowing inspection and testing of an earth rod while disconnected from the lightning protection system network.

L	W	H	Weight	Pack Qty	Part Number
178	97	77	1.16	1	EBC 001

Material:

Mounting Bracket - Zinc Plated Steel.

Insulators - Reinforced Polyester with Metal Inserts.

Earth Bar - Copper.

