

LIGHTNING PROTECTION

Corrugation Holdfast

The corrugation holdfast is used for attaching conductors to curved surfaces such as corrugated sheeting.


The holdfast has a threaded hole on the back so that the metallic or non metallic DC clips can be attached.

When this unit is fixed using the bolt provided, care should be taken to seal the hole using a compound such as Duxseal.


Tape Type	L	W	Weight	Pack Qty	Part Number
Copper	39	39	0.11	10	HCG 253
Aluminium	39	39	0.11	10	HCA 253

Material:

Gunmetal or Aluminium.

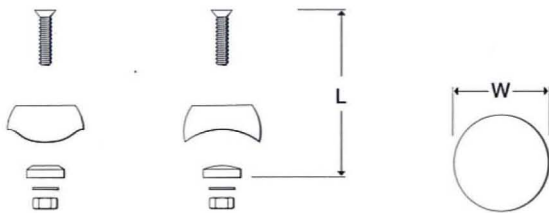

HCG 253

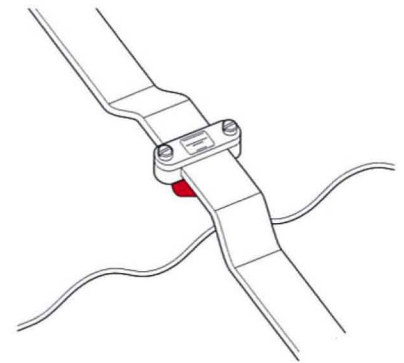

Slate Holdfasts - to suit 25 x 3 Tape

This Wallis holdfast provides a method for fixing the tape above the roof tiles without drilling holes.

The unit is made up from a soft aluminium tail attached to a non metallic DC clip.

The aluminium tail slides under the roof tile and is fixed to the wooden beam with a nail, the clip then protrudes from the tile and offers a fixing for the tape.


Other colours are available on customers request.

Tape Type	L	W	H	Tail Length	Colour	Weight	Pack Qty	Part Number
Bare	310	48	13	290	Brown	0.04	50	HSAL 253 MB
Bare	310	48	13	290	Grey	0.04	50	HSAL 253 GM
PVC	310	48	13	290	Brown	0.04	50	HSAL 253 B
PVC	310	48	13	290	Grey	0.04	50	HSAL 253 G

Material:

Tail - Aluminium.

Clip - Plastic.

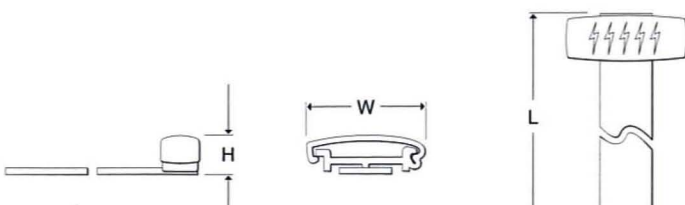

HSAL 253G

HSAL 253BL

