

LIGHTNING PROTECTION

Adhesive Bases

The adhesive base is used where no mechanical fixing method is possible or allowed to attach the roof conductor network.



The base itself has a threaded hole and is supplied with a fixing screw to suit the Wallis non metallic DC clips. When the base is glued in place the tape can be fixed into the clip attached to the base, the clip is not supplied with the base. The size of clip required depends on the conductor being installed.

The base is fixed using the adhesive peel off strip and must be applied to a clean dust free surface.

Colour	D	H	Weight	Qty Per Pack	Part Number
Brown	65	9	0.09	100	NB01B
Grey	65	9	0.09	100	NB01G

Material:

Polypropylene.

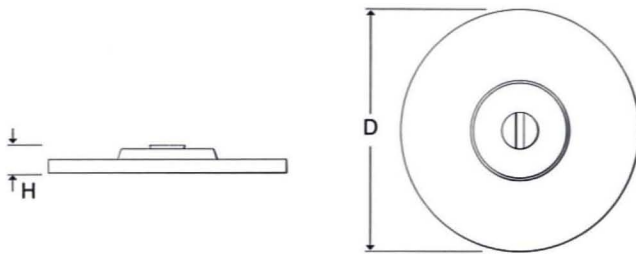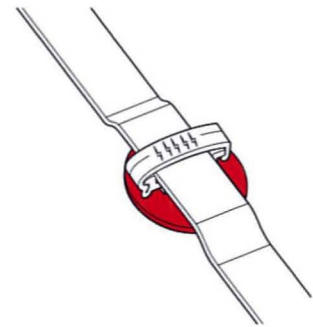

Back Plate Holdfast

This back plate holdfast is to be used where it is necessary to hold the conductor away from the building surface.

The back plate holdfast has two holes in the base for fixing in place and a threaded hole with a fixing screw to attach the Wallis non metallic or metallic DC clip onto the holdfast.

L	W	Weight	Pack Qty	Part Number
74	63	0.33	5	HBP

Material:

Gunmetal.

