

**Square Junction Clamps**




These Wallis four way connectors are suitable for crossing over tapes, making straight through joints or T connections in a continuous network of tapes.

The base has a countersunk hole in the middle for securing the clamp in place, the lid is secured by four screws. The screws are countersunk in the 25 x 3 versions, all the other clamps have proud headed screws.

Tape Size	Tape Type	L	Slot Size	Weight	Pack Qty	Part Number
25 x 3	Copper	50	26 x 3	0.15	25	JG 253
25 x 6	Copper	50	26 x 3	0.25	25	JG 256
31 x 3	Copper	60	32 x 3	0.22	25	JG 313
38 x 6	Copper	70	39 x 5	0.59	15	JG 386
50 x 3	Copper	77	51 x 3	0.50	10	JG 503
50 x 6	Copper	79	51 x 5	0.52	10	JG 506
25 x 3	Lead	67	27 x 5	0.86	10	JPB 253 L
25 x 3	Aluminium	50	26 x 3	0.07	25	JA 253
25 x 6	Aluminium	50	26 x 3	0.07	25	JA 256
38 x 6	Aluminium	70	39 x 5	0.09	15	JA 386
50 x 6	Aluminium	77	51 x 5	0.09	10	JA 506

**Material:**

Gunmetal or Aluminium.

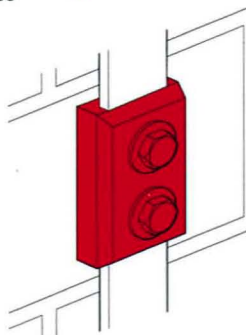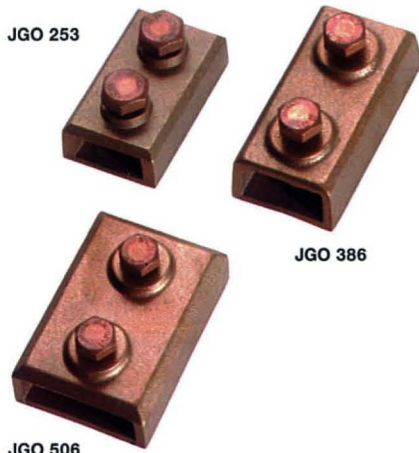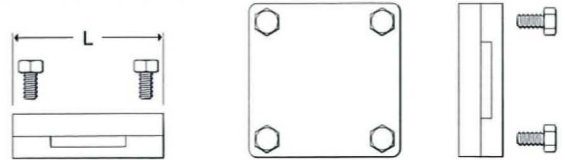

**Oblong Junction Clamp**

This oblong junction clamp is designed to join a range of tape sizes from 20 x 3 to 50 x 6. This Wallis clamp can also be used for disconnecting the earthing system for testing purposes.

The clamp in many applications allows the conductors to be overlapped and secured by two bolts.

Conductor	Tape Type	L	W	H	Slot Size	Weight	Pack Qty	Part Number
25 X 3	Copper	68	40	19	28 X 11	0.34	10	JGO 253
31 X 6	Copper	90	45	24	36 X 15	0.35	10	JGO 316
38 X 6	Copper	87	44	24	40 x 15	0.35	10	JGO 386
50 X 6	Copper	90	63	26	52 x 15	0.58	10	JGO 506
25 X 3	Lead	90	45	24	35 x 15	0.34	10	JPBO 253 L
25 X 3	Aluminium	68	40	19	28 X 18	0.11	10	JAO 253
50 X 6	Aluminium	90	63	26	52 x 15	0.15	10	JAO 506

**Material:**

Gunmetal or Aluminium.

