



**BSS 253**



**BIM 253**

**Bi Metallic Connectors**

These fittings are used to connect aluminium tape to copper tape. They are a neat and practical jointing method without the need for tinning, riveting or wrapping the joint.



It is recommended to use an oxide inhibiting compound with this connector (on page 58).

The unit is fixed to the wall and the conductors then fixed to the connector.

Tape Size	L	W	H	Bolt	Weight	Pack Qty	Part Number
25 x 3	98	29	25	M10 x 25	0.20	10	BIM 253
25 x 3	76	21	20	M10 x 10	0.16	10	BSS 253

**Material:**

Aluminium and Copper or Stainless Steel.

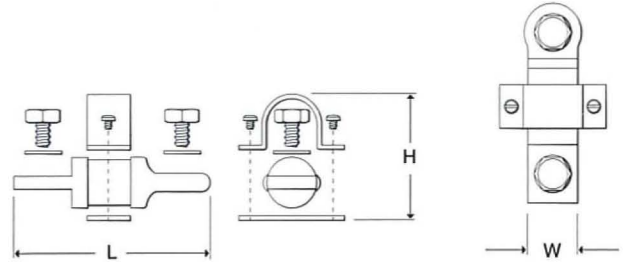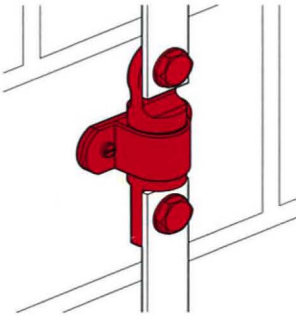

**BBG 253**

**BBG 253 SS**

**B Bonds**

This Wallis bond is used for bonding copper or aluminium tapes to flat metal surfaces.

Tape	L	H	Bolt	Weight	Pack Qty	Part Number
25 x 3 Copper	35	10	M10 x 25	0.04	10	BBG 253
25 x 3 Copper	35	10	M10 x 35	0.03	10	BBG 253SS
25 x 3 Aluminium	33	10	M8 x 35	0.01	10	BBA 253

**Material:**

Body: Aluminium or Gunmetal.

Bolt for BBG 253 SS and BBA 253 in Stainless Steel.

Bolt for BBG 253 Phosphor Bronze .

