




Test or Through Clamp

This test or through clamp is designed to join a 8mm circular conductor. This Wallis clamp can also be used for disconnecting the earthing system for testing purposes.

Conductor Dia	Conductor	L	W	H	Bolt	Weight	Pack Qty	Part Number
8	Copper	64	22	17	M10 x 20	0.17	25	JTG 08
8	Aluminium	64	22	17	M10 x 20	0.06	25	JTA 08

Material:

Body – Gunmetal or Aluminium.
Screw – Phosphor Bronze & Stainless Steel.

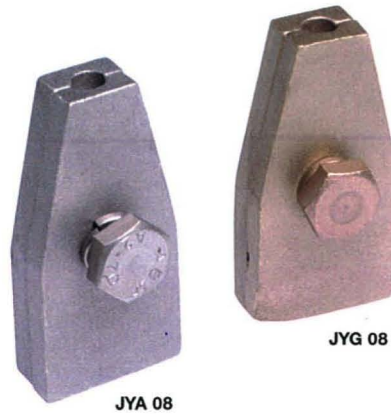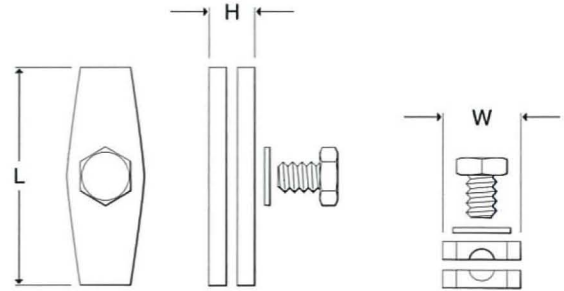

Interface Test Clamp

For connecting 25x3 tape to 8mm conductor.

This Wallis clamp is most commonly used where the lightning protection system has been designed in 8mm circular conductor and the connection to the earth rod is by 25x3 copper tape, the most economical way to change over is to install this clamp as the test point.

Conductor Dia	Conductor	L	W	D	Bolt	Weight	Pack Qty	Part Number
8	Copper	70	34	15	M10 x 16	0.25	25	JYG 08
8	Aluminium	70	34	15	M10 x 16	0.09	25	JYA 08

Material:

Aluminium or Gunmetal.

