

LIGHTNING PROTECTION



Flexible Braid Bond

This Wallis bond is used for bonding metal doors, gates, fences etc. Other lengths and sizes can be manufactured to customer requirements.

| Bond Width | L | To Suit Bolt | Weight | Pack Qty | Part Number |
|------------|-----|--------------|--------|----------|-------------|
| 25 x 3.5 | 200 | M10 | 0.04 | 10 | BFE 200 |
| 25 x 3.5 | 300 | M10 | 0.07 | 10 | BFE 300 |
| 25 x 3.5 | 400 | M10 | 0.11 | 10 | BFE 400 |

Material:

Copper - BS4109 C101.

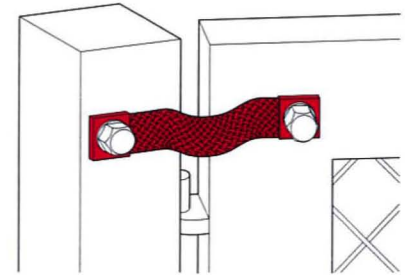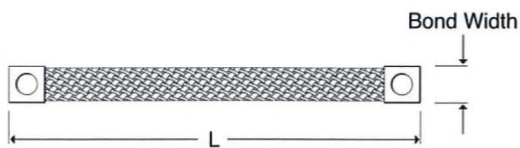

Strike/Interceptor Plate

These Wallis plates fit under the roof tile and are connected into the lightning protection system, the square strike pad protrudes from the tile.

| Conductor | L | D | Weight | Pack Qty | Part Number |
|-----------|-----|----|--------|----------|-------------|
| Copper | 550 | 50 | 0.32 | 5 | SPC |
| Aluminium | 500 | 50 | 0.05 | 5 | SPA |

Material:

Copper or Aluminium.

