

## LIGHTNING PROTECTION



### 8mm DC Clip

This adaptable clip can be used as a support for the 10mm dia air rod or as a heavy duty DC clip to suit 8mm bare and PVC covered conductor.

Conductor Dia	Conductor	L	W	H	Weight	Pack Qty	Part Number
8	Bare Copper	48	17	20	0.06	25	DCG 810
8	PVC Copper	48	17	20	0.06	25	DCG 815
8	Bare Aluminium	48	17	20	0.03	25	DCA 810
8	PVC Aluminium	48	17	20	0.03	25	DCA 815

**Material:**

Aluminium or Gunmetal.

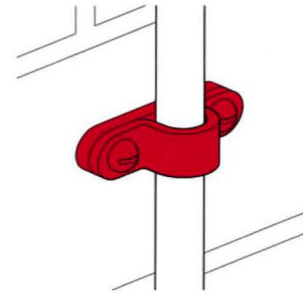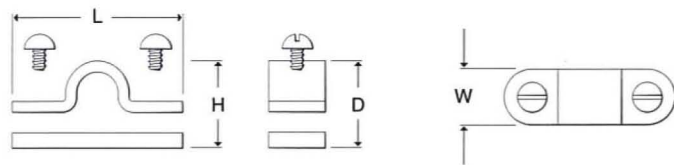

### Slate Holdfast

This Wallis holdfast provides a method for fixing 8mm bare conductor above the roof tiles without drilling holes.

The unit is made up from a soft aluminium or copper tail attached to a push in roof conductor clip.

The aluminium tail slides under the roof tile and is fixed to the wooden beam with a nail, the clip then protrudes from the tile and offers a fixing for the conductor.

All coloured clips available on customer request.

Conductor Dia	Colour	L	W	H	Clip Colour	Weight	Pack Qty	Part Number
8	Brown	320	18	14	Brown	0.01	50	HC 08 B
8	Grey	320	18	14	Grey	0.01	50	HA 08 G

**Material:**

Tail - Aluminium or Copper.

Clip - Polypropylene.

